

Analog and Digital Communication

Visualize and analyze the communication

Rajarshi Mahapatra



www.bpbonline.com

First Edition 2024

Copyright © BPB Publications, India

ISBN: 978-93-55519-214

All Rights Reserved. No part of this publication may be reproduced, distributed or transmitted in any form or by any means or stored in a database or retrieval system, without the prior written permission of the publisher with the exception to the program listings which may be entered, stored and executed in a computer system, but they can not be reproduced by the means of publication, photocopy, recording, or by any electronic and mechanical means.

LIMITS OF LIABILITY AND DISCLAIMER OF WARRANTY

The information contained in this book is true to correct and the best of author's and publisher's knowledge. The author has made every effort to ensure the accuracy of these publications, but publisher cannot be held responsible for any loss or damage arising from any information in this book.

All trademarks referred to in the book are acknowledged as properties of their respective owners but BPB Publications cannot guarantee the accuracy of this information.

To View Complete
BPB Publications Catalogue
Scan the QR Code:



www.bpbonline.com

Kup ksi k

Dedicated to

My beloved wife:

Sarmila

and

*My daughters **Sinjini** and **Rishika***

About the Author

Rajarshi Mahapatra received a Ph.D. in Electronics and Electrical Communication Engineering from the Indian Institute of Technology Kharagpur, India, and B.Tech. and M. Tech. degree in Optics and Optoelectronics from University of Calcutta. In his postdoctoral research in CEA-LETI, Grenoble, France, he was engaged the FP7 Call4 BeFEMTO and Greentouch project. He is an Associate Professor with the Department of Electronics and Communication Engineering, Dr. SPM IIIT Naya Raipur. He also served as the Dean (Academics) of IIITNR. Earlier, he worked for Collins Aerospace, Hyderabad, on software-defined radio and electronic warfare.

Dr. Rajarshi Mahapatra has worked extensively in the domain of physical layer design and analysis of a wireless communication system. His team designed and developed software-defined radio and direction-finding systems for EW applications in Collins Aerospace. industry. He has about 18 years of teaching, research, and industry experience. He has guided Ph.D. scholars in the area of wireless communication. He has published several research papers in various refereed Journals and IEEE Journals. He regularly reviews premier IEEE Transactions and other peer-reviewed Journals and IEEE conferences. He has been organizing many workshops on 5G in recent years. He has also developed several high-valued research labs, including the 5G test bed. He has completed and undertaken high-value sponsored projects in the field of communication systems.

He has been awarded a National scholarship, an MHRD scholarship for research, and an EU-FP7 fellowship for a European project. He is a senior member of IEEE and a member of the Communication Society. He has published over 70 peer-reviewed papers in several international journals and conferences. His research interests include 5G and beyond communication, Machine Learning for communication, molecular communication, intelligent reflecting surfaces, and optical access networks.

About the Reviewers

- ❖ **Gaurav Deshmukh** is a Senior Software Engineer Tech Lead with over a decade of experience in software engineering and technical management. He holds a Bachelor's in Computer Engineering and a Master's in Computer Science with a specialization in Computer Vision. Gaurav excels in Full-Stack Development, Cybersecurity and Cloud Technologies driving innovation in No Code Low Code automation solutions. His deep understanding of digital and analog communication and signals technology is essential for mastering Computer Engineering and Computer Vision, underpinning his ability to interpret and transmit data across platforms with efficiency and security. He is passionate about mentorship and knowledge sharing, he actively participates in IEEE and ACM, and mentors on platforms like ADPList and Criya. Gaurav stays at the forefront of emerging technologies, contributing as a technical reviewer for books on Systems Engineering, DevOps, Kubernetes, Generative AI, Cybersecurity, and Digital and Analog Communications. His unique blend of technical expertise and industry insight makes him a valuable contributor to the technology landscape.
- ❖ **Hekmat Farhat** is a Telecommunication Engineer and a Master's degree holder specializing in wireless communication. He also focuses on developing and designing wireless systems concerning frequency management and optimizing cellular systems. He is an active reader in various domains, such as space and satellite communication and optimizing the sixth generation of mobile communication, where he is a technical reviewer for various books about wireless, digital, and analog communication.
- ❖ **Dr. Preetam Kumar** is a Professor, Head of the Department of Electrical Engineering, at IIT Patna. With 20 years in academia and industry, his expertise spans wireless communications, 5G/6G, and ORAN. He has over 100 publications and serves as a reviewer and TPC member for top journals and conferences. Recognized with prestigious awards, He has held significant roles in academic events, such as the Organizing Chair of the IEEE Symposium on 6G at IIT Patna in December 2022, and the General Chair at NCC, IEEE, 2023, jointly organized by IIT Guwahati, IIT Patna, and IIT Ropar. His work has been recognized with the Best Paper Award at IEEE GLOBECOM 2023 and IEEE ICMOCE 2023. Dr. Kumar has guided numerous theses and projects, managed significant government and industry-sponsored projects, and contributed to editorial and administrative roles, driving innovation in electrical engineering and communications.

Acknowledgement

I want to express my deepest gratitude to my family and friends for their unwavering support and encouragement throughout this book's writing, especially my wife, Sarmila, and my twin daughters, Sinjini and Rishika.

I am also grateful to BPB Publications for their guidance and expertise in bringing this book to fruition. It was a long journey of revising this book, with valuable participation and collaboration of reviewers, technical experts, and editors.

I would like to express acknowledgment for the substantial contributions made by my students, particularly Satish, as well as my colleagues at various institutions, specifically at IIIT Naya Raipur. I must extend particular thanks to Dr. Debanjan and Dr. Venkanna for their exceptional motivation. Additionally, I am grateful to my co-workers throughout my years in academia, who have imparted valuable knowledge and provided constructive feedback on my work.

Finally, I would like to thank all the readers who have taken an interest in my book and for their support in making it a reality. Your encouragement has been invaluable.

Preface

Analog and Digital Communication is the foundational course for students pursuing a Bachelor of Technology degree, particularly those pursuing a degree in electronics and communication engineering. In addition, it serves as a foundational course for students interested in the **Information and Communication Technology (ICT)** domain. Many books can be found on this topic, and many of them are regarded as classic literature in this field.

On the other hand, I have observed that students need to feel more comfortable with these great works during my many years of teaching these subjects. Even though these books are of high quality, the representation or discussion of a specific topic is somewhat lengthy (which may be necessary to understand the subject matter better). For self-evident reasons, the books concentrate mainly on mathematical analysis. Yet, they do not provide supporting diagrams, which can significantly assist students who are just beginning their studies.

This book aims to offer students first-hand information about the topic and increase their interest in acquiring a more in-depth understanding of the subject from classic books in this field. Throughout my years of teaching this subject, I have observed that students find it challenging to visualize communication systems conceptually. Consequently, students lack enthusiasm for this field. Therefore, the reasons in this book are substantiated by including relevant figures or diagrams. This will enhance students' ability to understand the content more effectively through visualization. Some books are designed to be easily understood without any explanation, while others contain many mathematics and extensive explanations. The purpose of this book is to attempt to bridge that gap.

A distinctive feature of this book is the extensive use of diagrams to aid in conceptualizing the topics covered. This chapters of this book contain numerous solved problems based on GATE, IES, and other competitive examinations. Each chapter also contains a sample of Python code.

This is an essential book of communication that discusses the fundamentals of analog and digital communication. It contains twelve chapters altogether to visualize the present-day communication system. The material in these chapters is organized as follows:

Chapter 1: Introduction to Communication – The first chapter presents a detailed overview of the history of communication systems. It describes the condition for distortion-less transmission over communication channels and the need for modulation.

Chapter 2: Mathematical Basics – This chapter explains everything the reader needs to understand communication. It presents the signals, system, and basic mathematical operations on them, which are required to realize communication systems. Fourier series and Fourier transform, which are the basic building blocks to analyze the communication process are also discussed here. This chapter also covers the basic principle of probability theory and its applications to random variables and processes.

Chapter 3: Communication Channel – This chapter describes the different physical mediums used for communication, such as copper, wireless, and optical fiber. The properties of different communication channels, including wireless and optical channels are also discussed.

Chapter 4: Analog Modulation Techniques – This chapter offers an in-depth discussion of different analog modulation techniques. It allows the reader to learn fundamental concepts of analog modulation techniques. Various forms of **Amplitude Modulation (AM)** techniques, such as **double sideband-suppressed carrier (DSB-SC)**, conventional AM, **single sideband (SSB)**, **vestigial sideband (VSB)**, along with **frequency modulation (FM)**, and **phase modulation (PM)** techniques, are generated through the modulation of the amplitude, frequency, and phase of a carrier signal following the message signal. In addition to the modulation strategies, demodulation techniques are also discussed here. Apart from the standard way of transmitting messages using a continuous carrier signal, an alternate approach known as pulse modulation is employed to transmit the message signal.

Chapter 5: Sampling, Quantization, and Line Coding – This chapter provides a closer look at the analog-to-digital conversion, explicitly focusing on the mechanism involving the sampling and quantization processes. The quantized digital bits of the message are now represented by various line coding schemes, which are discussed here. Furthermore, the chapter also explores other strategies, such as PN sequence generation, scrambling mechanism, and pulse-shaping technique.

Chapter 6: Digital Modulation Techniques – This chapter discusses the various techniques employed in digital systems for quantization and encoding, including **pulse-code modulation (PCM)**, **differential PCM (DPCM)**, **adaptive DPCM (ADPCM)**, **delta modulation (DM)**, and **adaptive DM (ADM)**. The chapter studies various digital modulation techniques, including **amplitude shift keying (ASK)**, **phase shift keying (PSK)**, **frequency shift keying (FSK)**, and **quadrature amplitude modulation (QAM)**. This chapter also provides an overview of the various multiplexing techniques: **time-division multiplexing (TDM)** and **frequency-division multiplexing (FDM)**.

Chapter 7: Signal Detection in Presence of Noise – This chapter examines the influence of noise on detecting the message signal from the received noisy signal, employing various analog and digital modulation schemes. This chapter calculates the error probability of a particular digital modulation scheme by designing an optimal filter and utilizing the associated constellation diagram. This chapter also presents an eye diagram to mitigate **intersymbol interference (ISI)**.

Chapter 8: Information Theory – This chapter discusses the information rate of the channel and the possibility of error-free transmission over the channel. The source coding techniques are also discussed here. Shannon’s capacity theorem of a channel is the main topic in this chapter.

Chapter 9: Performance of Communication System – This chapter explores the performance of an end-to-end digital communication system. Error-free transmission or transmission with considerable error is one of the main performance criteria of the communication system that must be met. Apart from the **bit error rate (BER)**, the performance of end-to-end communication is measured with other factors, including capacity, coverage, outages, and so on. These criteria depend on several transmission and channel parameters such as the SNR, path loss, fading distributions, traffic conditions, service requirements, etc. In this chapter, we will have a detailed discussion of the many criteria and parameters, their interdependency, and how they affect one another.

Chapter 10: Channel Coding – This chapter deals with error-control coding, utilized inside digital communication systems to detect and correct bit errors. Several channel coding techniques, such as Linear block, Cyclic, Convolution, Viterbi decoder, BCH, and Turbo codes, are discussed here.

Chapter 11: Wireless Communication – This chapter presents various technologies used in wireless communication to improve the performance of wireless communication systems. Wireless communication has been developed from **first-generation (1G)** analog systems to **fifth-generation (5G)** digital systems to satisfy user requirements. Over the years, wireless communication has changed its requirements, characteristics, and services.

Chapter 12: Optical Communication – This chapter deals with optical communication. It provides an overview of the components of optical communications. The basic standards used in optical communication are also discussed.

Code Bundle and Coloured Images

Please follow the link to download the
Code Bundle and the *Coloured Images* of the book:

<https://rebrand.ly/j2x44x8>

The code bundle for the book is also hosted on GitHub at

<https://github.com/bpbpublications/Analog-and-Digital-Communication>.

In case there's an update to the code, it will be updated on the existing GitHub repository.

We have code bundles from our rich catalogue of books and videos available at
<https://github.com/bpbpublications>. Check them out!

Errata

We take immense pride in our work at BPB Publications and follow best practices to ensure the accuracy of our content to provide with an indulging reading experience to our subscribers. Our readers are our mirrors, and we use their inputs to reflect and improve upon human errors, if any, that may have occurred during the publishing processes involved. To let us maintain the quality and help us reach out to any readers who might be having difficulties due to any unforeseen errors, please write to us at :

errata@bpbonline.com

Your support, suggestions and feedbacks are highly appreciated by the BPB Publications' Family.

Did you know that BPB offers eBook versions of every book published, with PDF and ePub files available? You can upgrade to the eBook version at www.bpbonline.com and as a print book customer, you are entitled to a discount on the eBook copy. Get in touch with us at :

business@bpbonline.com for more details.

At **www.bpbonline.com**, you can also read a collection of free technical articles, sign up for a range of free newsletters, and receive exclusive discounts and offers on BPB books and eBooks.

Piracy

If you come across any illegal copies of our works in any form on the internet, we would be grateful if you would provide us with the location address or website name. Please contact us at **business@bpbonline.com** with a link to the material.

If you are interested in becoming an author

If there is a topic that you have expertise in, and you are interested in either writing or contributing to a book, please visit **www.bpbonline.com**. We have worked with thousands of developers and tech professionals, just like you, to help them share their insights with the global tech community. You can make a general application, apply for a specific hot topic that we are recruiting an author for, or submit your own idea.

Reviews

Please leave a review. Once you have read and used this book, why not leave a review on the site that you purchased it from? Potential readers can then see and use your unbiased opinion to make purchase decisions. We at BPB can understand what you think about our products, and our authors can see your feedback on their book. Thank you!

For more information about BPB, please visit **www.bpbonline.com**.

Join our book's Discord space

Join the book's Discord Workspace for Latest updates, Offers, Tech happenings around the world, New Release and Sessions with the Authors:

<https://discord.bpbonline.com>



Table of Contents

1. Introduction to Communication	1
Structure.....	1
Objectives.....	2
1.1 Electrical or electronic communication	2
1.2 Evolution of communication	3
1.2.1 Wired communication.....	4
1.2.2 Wireless communication.....	5
1.2.3 Optical communication	8
1.3 Basic communication	12
1.3.1 Transmission through LTI system	12
1.3.2 Distortion-less transmission.....	14
Amplitude distortion.....	15
Phase distortion.....	15
Nonlinear distortion.....	16
Harmonic distortion.....	16
1.3.3 Need for modulation	17
1.3.4 Types of modulation.....	19
1.4 Communication receiver	21
1.4.1 Characteristics of receiver	21
Selectivity	22
Sensitivity	22
Fidelity.....	22
1.4.2 Types of receiver.....	23
Homodyne receiver	23
Heterodyne receiver	23
Superheterodyne receiver.....	24
1.5 Basic framework of communication system.....	25
Summary.....	29
Further reading	29
Python code.....	29
Multiple choice questions.....	31

Answer.....	32
Exercises.....	33
2. Mathematical Basics.....	35
Structure.....	35
Objectives.....	36
2.1 Signal.....	36
2.1.1 Type of signals.....	36
2.1.2 Energy and power signal	39
2.1.3 Useful signals	40
Unit impulse signal.....	40
Unit step signal	41
Unit ramp function	42
2.1.4 Operation on signal	43
2.2 System	45
2.2.1 Systems with memory and without memory.....	45
2.2.2 Causal and noncausal system	45
2.2.3 Stability.....	46
2.2.4 Linear and nonlinear system	46
2.2.5 Time invariant and time-varying system	46
2.3 Convolution.....	47
2.4 Fourier series.....	48
2.4.1 Complex exponential Fourier series.....	48
2.4.2 Trigonometric Fourier series.....	49
2.4.3 Harmonic form Fourier series.....	49
2.4.4 Convergence of Fourier Series	50
2.4.5 Parseval's theorem	50
2.4.6 Gibbs Phenomena.....	51
2.5 Fourier transform	51
2.5.1 Duality of Fourier transform.....	57
2.5.2 Properties of Fourier transform	58
Linearity	58
Time shifting.....	58
Frequency shifting.....	59
Time scaling.....	59

Time reversal	59
Differentiation and integration	59
Parseval relation.....	60
Time domain convolution.....	60
Filtering.....	61
Frequency convolution	61
2.6 Hilbert transform.....	62
2.7 Probability theory	64
2.7.1 Some properties of probability.....	65
2.7.2 Joint and conditional probability	65
Joint probability.....	65
Conditional probability	66
2.7.3 Bayes' rule.....	66
2.7.4 Independence.....	68
Two events.....	68
Multiple events.....	69
2.8 Random variable	69
Condition of random variable.....	70
2.8.1 Types of random variables.....	70
Discrete random variable	70
Continuous random variable.....	71
2.8.2 Probability mass, density, and distribution function	71
Probability density function.....	71
Probability mass function	72
Cumulative distribution function	73
2.8.3 Operation on random variable.....	74
Mean or expectation	75
Variance.....	75
2.8.4 Several distribution and density functions.....	76
Binomial distribution	76
Poisson distribution	77
Uniform distribution.....	78
Exponential distribution	78
Gaussian distribution.....	79

2.8.5 Central limit theorem.....	80
2.8.6 Correlation and covariance	81
2.8.7 Random process and sequence	82
2.8.8 Stationary process and autocorrelation	83
2.8.9 Power spectral density and autocorrelation	84
Summary.....	85
Further reading.....	85
Solved problems	85
Python code.....	92
Multiple choice questions.....	95
Answer.....	97
Exercises.....	97
3. Communication Channel	101
Structure.....	101
Objectives.....	102
3.1 Copper cable.....	102
3.1.1 Twisted pair cable.....	102
3.1.2 UTP and STP cable	103
3.1.3 Coaxial cable	104
3.2 Wireless channel	104
3.2.1 Pathloss	106
3.2.2 Shadowing	108
3.2.3 Fading	108
Delay spread	109
Doppler spread	110
Angular spread.....	111
Types of fading.....	112
Rayleigh distribution.....	114
Rician distribution	114
Nakagami distribution	115
3.3 Optical fiber cable.....	115
3.3.1 Type of optical fiber	116
3.3.2 Propagation in optical fiber.....	116
3.3.3 Losses in fiber	119

Intrinsic loss	120
Extrinsic loss	121
Bending loss	122
3.3.4 Dispersion in fiber	124
3.4 Noise in the communication system.....	127
3.4.1 Effect of noise	127
3.4.2 Type of noise.....	128
Thermal noise	128
Shot noise	129
Burst noise.....	129
Color of noise	129
White noise	130
Pink noise	130
Atmospheric noise	130
Solar noise	130
Cosmic noise.....	130
Summary.....	130
Further reading	131
Python code.....	131
Plot a signal and signal with noise.....	131
Multiple choice questions.....	133
Answer.....	135
Exercises.....	135
4. Analog Modulation Technique	137
Structure.....	138
Objectives.....	138
4.1 Introducing analog modulation	138
4.2 Double sideband modulation technique.....	139
4.2.1 Transmitted power in DSB-SC	141
4.2.2 Demodulation of DSB-SC signal	142
4.2.3 Disadvantage of DSB-SC modulation	143
4.2.4 Synchronous demodulator.....	144
4.3 Amplitude modulation technique.....	145
4.3.1 Tone modulation	146

4.3.2 Demodulation of AM signal.....	149
4.3.3 Comparison between DSB-SC and DSB-AM.....	151
4.4 Single sideband modulation technique.....	152
4.4.1 Advantages and disadvantages of SSB.....	153
4.4.2 Designing of the sideband filter	154
4.4.3 Representation of SSB signal.....	155
4.4.4 Demodulation of SSB signal.....	157
4.5 Vestigial sideband modulation technique.....	158
4.5.1 Demodulation of VSB signal	160
4.6 Angle modulation.....	162
4.6.1 General expression of FM and PM.....	165
4.6.2 Frequency domain representation.....	166
Properties of Bessel functions.....	167
4.6.3 Types of frequency modulation	169
Narrowband FM.....	169
Wideband FM.....	170
4.6.4 Demodulation of FM signal.....	170
Phase-locked loop.....	171
4.6.5 Generation of FM signal	172
Generation of Narrowband FM.....	172
Generation of Wideband FM.....	173
4.7 Pulse modulation techniques.....	174
4.7.1 Pulse amplitude modulation.....	175
4.7.2 Pulse width modulation.....	176
4.7.3 Pulse position modulation	178
4.8 Analog I/Q modulation	178
4.9 Transmission mechanism	180
4.9.1 Tuned radio frequency receiver	180
4.9.2 Homodyne receiver	182
4.9.3 Heterodyne receiver	182
4.9.4 Superheterodyne receiver	185
Summary.....	186
Further reading	187
Solved problems	187

Python code.....	194
Multiple choice questions.....	198
<i>Answer</i>	201
Exercises.....	202
5. Sampling, Quantization, and Line Coding.....	207
Structure.....	207
Objectives.....	208
5.1 Sampling theory	208
5.1.1 Reconstruction of a signal	210
5.1.2 Aliasing effect	213
5.1.3 Bandpass sampling	215
5.1.4 Types of sampling techniques	216
5.2 Uniform quantizer.....	217
5.2.1 Quantization noise	219
5.3 Line coding technique.....	221
5.3.1 Characteristics of line coding.....	221
5.3.2 Different line coding technique.....	222
Unipolar non-return to zero.....	223
Unipolar return-to-zero.....	224
Polar NRZ.....	224
Polar RZ.....	224
Bipolar NRZ.....	225
5.3.3 Comparison.....	225
5.4 Pseudo-random Noise sequence	225
5.5 Scrambling.....	226
5.6 Pulse shaping filter.....	228
Summary.....	231
Further reading	231
Solved problems	231
Python code.....	233
Multiple choice questions.....	235
<i>Answer key</i>	236
Exercises.....	237

6. Digital Modulation Techniques.....	239
Structure.....	240
Objectives.....	240
6.1 Introduction to digital communication.....	240
6.1.1 Advantages of digital communication.....	241
6.2 Pulse code modulation	242
6.2.1 Uniform quantizer.....	242
6.2.2 Non-uniform quantizer	243
6.2.3 Compander.....	245
6.2.4 Transmission bandwidth.....	246
6.2.5 Differential pulse code modulation.....	248
Processing gain.....	250
6.2.5 Adaptive Differential PCM	251
4.2.6 Delta modulation	251
6.2.7 Adaptive Delta Modulation.....	254
6.3 Multiplexing techniques.....	255
6.3.1 Time Division Multiplexing.....	256
Asynchronous time division multiplexing.....	257
Synchronous time division multiplexing.....	257
Plesiochronous digital hierarchy system.....	258
6.3.2 Frequency division multiplexing.....	259
6.4 Digital modulation techniques	260
6.4.1 I/Q representation of digital carrier.....	261
6.4.2 Constellation diagram.....	262
6.4.3 Amplitude shift keying	263
6.4.4 Frequency Shift Keying	265
6.4.5 Binary Phase Shift Keying.....	266
Synchronous demodulation.....	267
6.4.6 Quadrature Phase Shift Keying.....	270
QPSK transmitter	270
6.5 Quadrature amplitude modulation	273
6.6 Transmission mechanism	276
Summary.....	277
Further reading.....	277

Solved problems	277
Python code.....	279
Multiple choice questions.....	281
<i>Answer</i>	283
Exercises.....	283
7. Signal Detection in Presence of Noise.....	285
Structure.....	286
Objectives.....	286
7.1 Detection in analog communication.....	286
7.1.1 Baseband system	288
7.1.2 DSB-SC system	289
7.1.3 Amplitude modulation system.....	291
SNR calculation with envelop detector	292
Small-noise case.....	293
Large noise case	294
7.1.4 Phase modulation.....	294
Small noise case	295
7.1.5 Frequency modulation	297
7.2 Detection in digital communication	298
7.2.1 Signal-to-noise ratio	299
7.2.2 Probability of error.....	300
7.2.3 Error probability in regenerative repeater	303
7.3 Optimum filter: Matched filter	305
7.3.1 White noise case	306
7.3.2 Error probability of matched filter	308
7.4 Coherent receiver.....	311
7.4.1 Error probability in BPSK.....	312
7.4.2 Error probability in BASK.....	313
7.4.3 Error probability in BFSK	314
7.4.4 Error probability in QPSK	315
7.5 Signal space representation.....	317
7.5.1 Maximum a posteriori detector	320
7.5.2 Maximum likelihood receiver.....	321
7.5.3 Error probability	321

7.5.4 M-ary PSK.....	323
7.5.5 M-ary ASK.....	325
7.5.6 M-ary QAM.....	326
7.6 Comparing error probabilities.....	328
7.7 Intersymbol interference	330
7.7.1 Nyquist Criteria for No ISI	331
7.7.2 Using raised cosine filter	332
7.8 Eye diagram	332
Summary.....	335
Further reading.....	336
Solved problems	336
Python code.....	337
Multiple choice questions.....	338
Answer.....	342
Exercises.....	342
8. Information Theory.....	345
Structure.....	345
Objectives.....	345
8.1 Information.....	346
8.1.1 Self-information	347
8.1.2 Entropy	348
8.1.3 Information rate.....	350
8.2 Source coding.....	351
8.2.1 Shannon-Fano coding.....	352
Algorithm	353
8.2.2 Huffman coding.....	354
Algorithm	354
8.2.3 Arithmetic coding	355
8.3 Information transmission.....	358
8.3.1 Joint and conditional entropy	358
8.3.2 Mutual information.....	360
8.4 Channel capacity	361
8.4.1 Shannon capacity theorem.....	362
8.4.2 Capacity of AWGN channel	362

Proof	363
8.4.3 Shannon limit	365
8.4.4 Channel capacity in a different channel.....	368
Noiseless binary channel	368
Noisy channel with nonoverlapping outputs.....	369
Binary symmetric channel	369
Binary erasure channel.....	370
Summary.....	371
Further reading	371
Solved problems	371
Python code.....	374
Multiple choice questions.....	375
Answer key	377
Exercises.....	378
9. Performance of Communication System.....	381
Structure.....	382
Objectives.....	382
9.1 Bit-error rate	382
9.1.1 Signal-to-noise ratio	383
9.1.2 Error probability and BER.....	385
9.1.3 BER as measured finite samples	386
Monte Carlo simulation	388
9.1.4 Interpretation of BER value.....	388
9.2 BER versus SNR plot.....	388
9.3 Constellation diagram vs. SNR	390
9.4 Eye diagram vs. SNR	395
9.5 Relationship between BER and capacity	395
9.6 Selection of modulation scheme.....	398
9.7 Performance in wireless system	400
9.7.1 Average BER.....	401
9.7.2 Outage probability.....	403
9.7.3 Coverage.....	404
9.7.4 Average capacity	404
9.8 Quality of service.....	405

9.8.1 Class of service	406
9.8.2 Grade of Service	407
9.8.3 Quality of Experience	407
9.8.4 Mean Opinion Score	408
Summary	408
Further reading	409
Solved problems	409
Python code	412
Multiple choice questions	414
Answer	416
Exercises	416
10. Channel Coding	419
Structure	419
Objectives	420
10.1 Introducing channel coding	420
10.2 Linear block code	422
10.3 Cyclic code	426
10.4 Convolution code	428
10.5 Viterbi decoder	431
10.6 BCH code	432
10.7 Turbo code	435
10.8 Performance of channel coding	437
Summary	439
Further reading	439
Solved problem	440
Multiple choice questions	442
Answer	443
Exercises	443
11. Wireless Communication	445
Structure	445
Objectives	446
11.1 Duplexing	446
11.1.1 Frequency Division Duplexing	446

11.1.2 Time Division Duplexing	447
11.2 Cellular concept	447
11.2.1 Frequency reuse.....	448
11.3 Diversity techniques.....	450
11.3.1 Frequency diversity: OFDM	451
11.3.2 Spatial diversity	454
Array and diversity gain.....	455
11.3.3 Combining schemes.....	456
11.3.4 Transmit diversity.....	460
11.3.5 MIMO system: Space time coding.....	464
11.4 Smart antenna	465
11.5 Other transmission technologies	468
11.5.1 Link adaptive technique	468
11.5.2 Massive MIMO	469
11.5.3 Heterogeneous network.....	471
11.5.4 Software defined radio.....	472
11.5.5 Cognitive radio.....	474
11.5.6 Green communication.....	476
11.6 Cellular standards.....	478
11.7 Wireless LAN	480
11.8 5G technologies.....	481
Summary.....	483
Further reading.....	483
Multiple choice questions.....	483
Answer.....	486
Exercises.....	486
12. Optical Communication	489
Structure.....	489
Objectives.....	489
12.1 Optical communication system	490
12.2 Optical components	492
12.2.1 Optical fiber cable	492
12.2.2 Optical sources.....	494
Working principle of LASER	494

<i>Febry-Perot laser</i>	496
<i>Distributed-feedback laser</i>	497
<i>Tunable laser</i>	497
12.2.3 <i>Optical coupler</i>	498
12.2.4 <i>Optical amplifier</i>	499
<i>Erbium-doped fiber amplifiers</i>	500
<i>Raman optical amplifier</i>	501
<i>Semiconductor Optical Amplifier</i>	501
12.2.5 <i>Optical filter and multiplexer</i>	502
<i>Fiber Bragg gratings</i>	503
<i>Dielectric thin-film filters</i>	503
<i>Arrayed waveguide grating</i>	503
12.2.6 <i>Optical add and drop multiplexer</i>	504
12.2.7 <i>Optical cross-connect</i>	505
12.2.8 <i>Optical detector</i>	507
12.3 <i>Optical communication standards: SDH and SONET</i>	508
Summary.....	511
Further reading	511
Multiple choice questions.....	511
<i>Answer</i>	513
Problems	514
Index	515-530

CHAPTER 1

Introduction to Communication

Communication is the transfer of information through a message signal. The goal is to reproduce the received message sent from the transmitter as accurately as possible. The message will be conveyed, or the information will be transmitted in the form of an electrical signal, thus known as an **electrical communication system**, which enables instantaneous interaction with a user located at a considerable distance. For example, we can communicate via voice with a person, download a file from a web page with the click of a mouse, watch a movie from YouTube, or send a message to a friend; all may be located anywhere on the globe. This illustrates the importance of communication systems in this information age.

This chapter introduces communication and its evolution. It describes the condition for distortion-less transmission over communication channels and the need for modulation. Later, it discusses the basic framework of a communication system with an example of the latest smartphone.

Structure

In this chapter, we will cover the following topics:

- Electrical or electronic communication
- Evolution of communication describes the evolution of wired, wireless, and optical communication.

- Basic communication presents the distortion-less transmission, need for modulation, and types of modulation.
- Communication receiver describes the basic requirements and architecture of the radio receiver.
- Basic framework of communication system briefs the building blocks used for communication.

Objectives

The main objectives of this chapter are to develop a basic understanding of communication systems, commencing with an exploration of the evolutionary progression of various communication systems, including wired, wireless, and optical systems. The reader is expected to gain an understanding of the method by which signals are transmitted through various systems, as well as the concept of distortion-free transmission. This observation further emphasizes the need for modulation in communication systems. Readers also need to examine the fundamental characteristics of receivers and explore various receiver structures. In conclusion, it is essential to explore the fundamental components of a communication system.

1.1 Electrical or electronic communication

Communication was initiated to send voice signals from one place to a distant location. The voice signal is analog and can be described as a voltage signal. This voltage signal is nothing but an electrical signal. In the initial days, communication occurred through the analog domain. This analog communication transmitted the electrical signal over the communication channel. The signal was received at the destination through simple electrical components like tune circuits, filters, amplifiers, multipliers, and so on. The processing, analyzing, transmitting, and receiving of the entire communication system is considered the voice signal as an electrical signal, and the devices used in communication are also simple in nature. In this context, the communication can be named as **electrical communication**.

After the advancement of digital signal processing, the entire communication system has slowly been incorporated into the electronics domain. All complex processing, controls, monitoring, and others are done at the baseband level. The voice signal is first converted into the baseband domain, the digital domain. All kinds of signal processing algorithms are used to improve the quality of communication, and finally, it is converted back to the analog domain. Humans can produce and understand the voice signal in analog form. However, present-day communication systems not only transmit voice signals, they transmit digital data as well. This digital data is generated by the devices and used by the device only. Digital electrical signals contribute an important but small part of the process.

The tasks involved in digital communication are so complex that all tasks are divided into different layers: physical (the lowest), data link, network, transport, session, presentation, and application (the upper). The physical layer consumes higher power as it represents the digital bits. This layer takes part in data transmission from one node to another. Most of the tasks of other layers are done at the baseband level through the complex switch, router, desktop, laptops, mobile, and so on. Electronic communication, which employs computers, e-mail, telephones, video calling, FAX machines, and so on, uses electronic means to send information or a message rather than a basic circuit. This sort of communication can be produced by exchanging data like images, graphics, sounds, photos, maps, software, and so on. Eventually, electrical communication is known as more of an electronic communication than electrical communication.

1.2 Evolution of communication

Communication enables us to pass information. It is exchanging words, signs, or information among users or devices. It is done either verbally or non-verbally. It existed in ancient times as smoke signals, flags, flashing mirrors, fires, and so on, as shown in *Figure 1.1*:

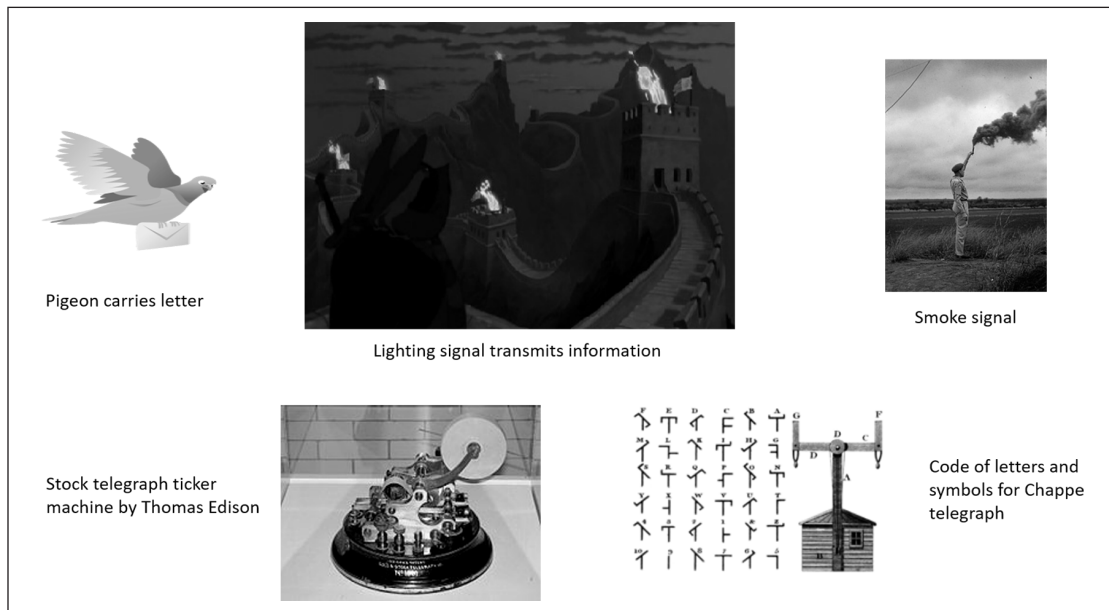


Figure 1.1: Early communication mechanism

Based on the communication channel, the telecommunication system is divided into three categories: wired, wireless, and optical. The division is mainly based on the transmission medium (as elaborated in *Chapter 3, Communication Channel*) and information-carrying signals. The transmission medium of wired and optical communication is bounded

by copper wires and optical fiber, respectively, and wireless communication uses the unbounded wireless medium.

1.2.1 Wired communication

Samuel Thomas, a German physician, anatomist, and inventor, conducted an early electrical telegraphy experiment in 1809. In contrast, *Francis Ronalds* used static electricity to create the first functional telegraph in 1816. By 1878, *Alexander Graham Bell* had developed the electric telephone in the United States. In 1880, *Bell* and his co-inventor *Charles Tainter* transmitted signals via modulated light beams projected by photophones.

In New Haven, Connecticut, the first commercial telephone exchange in North America was established in 1878. Point-to-point link is used for voice communication using analog signals. Telephones had to be interconnected by copper wires to establish a call between two people. Different types of copper wire are used in telephone and data communication. These are twisted pair cables, coaxial cables, and so on. However, the usage of copper wires is limited by their transmission capacity over a larger distance. Present day, its use is limited by the in-house data network and cable TV network.

A more practical solution was adopted rather than connecting every telephone. A manually controlled switchboard is used, which connects the phones. The switchboard works in a central telephone network mechanism. The **public switched telephone network (PSTN)** was first implemented using mechanical switchboards in the US in 1878. PSTN consists of phones, telephone exchanges, and interconnecting facilities, which provide phone service to the public.



Figure 1.2: A few famous pioneers in the field of communication

Almon Strowger patented the Strowger switch, the first Automatic telephone exchange, in 1891. The first transcontinental telephone call occurred in 1915. In 1926, the first transatlantic telephone call was made from London to New York.

Although it started as analog communication, the telephone network slowly started digital with the introduction of digital equipment. Introducing digital telephony into the telephone network improves the quality, adds new features, and reduces the cost of conventional voice services. In addition to voice services, a digital network is a natural environment for data communication services.

With the advent of digital telephony, voice and signaling were transformed into a stream of bytes, sending numerous signals over a single channel. This has enhanced sound quality, decreased network costs, and boosted call capacity per cable. New possibilities in telephony have emerged due to digital technology and the introduction of the personal computer in the 1980s. Making phone calls and managing the calling process using a computer became possible. Computer networks began to *gain* capabilities akin to those of telecommunications networks; simply conveying voices of high quality was no longer enough.

Since the 1990s, improvements in digital telephony have increased its dependability and reduced its cost. **Voice over IP (VoIP)** technology has made it possible for voice and data to transmit over the same lines, which helps to cut expenses. ARPANET considered the forerunner of the Internet, was used to transmit speech samples between two computers. It is believed that the first two-way voice call via the ARPANET in December 1974 marked the beginning of VoIP. Dynamic technologies, like SIP trunking, which interact with VoIP to increase power and dependability, provide significant cost savings for businesses on their telecommunication expenses.

1.2.2 Wireless communication

Radio communication started after *Faraday* invented electromagnetic waves in the 1880s. Later, *Maxwell* derived four famous equations, named *Maxwell Equation*, in 1884. The oscillation unit of the e. m. wave is Hz after *Hertz* detected its oscillation and various properties around 1887. In the 1890s, *Nikola Tesla* tried to develop electrical power transmission without wires. This was an expansion of his wireless lighting work. *Prof. Jagadish Chandra Bose* first demonstrated **electromagnetic (EM)** waves as a communication medium. In 1894, *Bose* gave his first public demonstration to ring a bell and explode some gunpowder remotely using EM waves. In 1896, the *Daily Chronicle* of the U.K. reported that, *the inventor (J. C. Bose) has transmitted signals to a distance of nearly a mile, and herein lies the first and obvious and exceedingly valuable application of this new theoretical marvel.*

Guglielmo Marconi demonstrated the wireless telegraph in 1896 at the English telegraph office. However, *Marconi* successfully transmitted a radio signal using the Morse code letter 's' across the Atlantic Ocean from Cornwall to Newfoundland at a distance of 3500 km in 1901. But it will take another 13 years to send the voice-over radio transmission.